



CANCELLED

PATENT APPLICATION TRANSMITTAL LETTER

ATTORNEY'S DOCKET NO.

000396A

TO THE COMMISSIONER OF PATENTS AND TRADEMARKS:

Transmitted herewith for filing is the patent application of J. Carl Cooper

for IMPROVED IFB SYSTEM APPARATUS AND METHOD

Enclosed are:

- ☐ 3 sheets of drawing.
- ☐ an assignment of the invention to _____
- ☐ a certified copy of a _____ application.
- ☐ associate power of attorney.
- ☒ verified statement to establish small entity status under 37 CFR 1.9 and 1.27.

CLAIMS AS FILED

FOR	NO FILED	NO EXTRA
BASIC FEE <u>385</u>		
TOTAL CLAIMS <u>51</u>	<u>- 20 -</u>	<u>31</u>
INDEP CLAIMS <u>3</u>	<u>- 3 -</u>	<u>0</u>
MULTIPLE DEPENDENT CLAIM PRESENT <u>yes</u>		

SMALL ENTITY

RATE	FEE
	\$385
<u>11</u>	\$341
	\$0
	\$130
TOTAL	\$856

OTHER THAN A SMALL ENTITY

RATE	FEE
	\$
	\$
	\$
	\$
TOTAL	\$

* If the difference in col. 1 is less than zero, enter "0" in col. 2

- ☒ Please charge my Deposit Account No. 16-1940 in the amount of \$ 856.00.
- ☒ A duplicate copy of this sheet is enclosed.
- ☐ A check in the amount of \$ _____ to cover the filing fee is enclosed.

- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-1940. A Duplicate copy of this sheet is enclosed.

☒ Any additional filing fees required under 37 CFR 1.16.

☒ Any patent application processing fees under 37 CFR 1.17.

- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 16-1940. A duplicate copy of this sheet is enclosed.

☒ Any filing fees under 37 CFR 1.16 for presentation of extra claims.

☒ Any patent application processing fees under 37 CFR 1.17.

☐ The issue fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

3/14/97
date

[Signature]
signature

"Patented" 3/14/97

08/824496

A

08/824496



IMPROVED IFB SYSTEM APPARATUS AND METHOD

The present application claims the benefit of U.S. provisional application serial number 60/013,545 filed 03/14/96 which application is incorporated herein by reference.

BACKGROUND OF THE INVENTION

The invention relates to the use of Interrupted Feed Back (IFB) systems in production of television and radio like programs. The invention shows a method of reducing or removing annoying delayed versions of the talent audio signals from the communication link from the program director back to the talent (IFB). In a common application of the invention, the delayed version of the talent's voice can be removed from the program audio which is mixed with the director's voice instructions to be fed back to the talent's headset. Other uses and purposes for the present invention will also become known to one skilled in the art from the teachings herein.

1. Field of the Invention

This invention relates to the field of audibly communicating with remotely located actors and reporters in radio and television systems.

2. Description of the Prior Art

4-6-97 "State 330"

4,547,630 "Patented" 5-27-63

In the Prior art it is known to provide audible communications from a director who is physically located at a television or radio station to the talent (a reporter or actor) who is physically located at a remote site. Such communications are desired to contain both the director's voice instructions to the talent and the program audio. The program audio which is sent back to the talent is intended to not include the talent's voice (commonly called mix minus) but otherwise is the program as it is broadcast from or stored at the facility. This IFB audio allows the talent to both hear the director's instructions, for example to get ready for joining the broadcast "live" and to hear the other actors voices, for example so they can directly respond to questions. Examples of these situations are often seen on local news programs where a reporter at a remote news location joins the news broadcast and converses with the news anchors at the station.

Generating the mix minus audio is performed in parallel with generating the normal program audio, thus two separate mixing facilities are required. Such system allows the talent to hear both the director's instructions and the program audio, without the annoying effect of hearing his own voice. Such systems are called IFB systems (interrupted feed back). It is important that the talent not hear his own voice, as this is disconcerting and makes it difficult for the talent to speak.

Unfortunately, at times it is inconvenient or impossible to create the mix minus version of the program audio in which the reporter's voice is absent but all other audio content is pres-

ent. In these situations, the regular program (with the reporter's voice) is sent over the IFB channel. This causes an annoyance to the reporter, especially when there is a significant delay in his voice. These situations often happen when the station runs out of space on its audio mix board, or a news event happens suddenly and there is no time to set up a mix minus or IFB link to the reporter.

Figure 1 shows an example of the prior art in which the invention finds use. **Figure 1** represents a television or radio production system in which a talent is located some distance from a station. The talent speaks into a microphone 10 and the audio signal from 10 is amplified and sent back to the station over a return microwave or satellite link via an ENG truck 11, transmitter 19, and microwave receiver 3. There is frequently some delay involved in this return link, especially when it is via satellite. This delay is one cause of the problems which the present invention addresses. At the station the talent's audio is mixed into an audio program in a mix board 4. The program audio is then passed through a delay 5 to the program transmitter 17, recorder and/or other use. This delay is another cause of the problems which the present invention addresses. The **Figure 1** system demonstrates the case where there is no separate mix-minus signal generated to feed the IFB return.

If there were a separate mix-minus signal generated, a separate mix board 4 would mix all of the program audio, the same as 4, except it would not mix the talent audio from 3. This mix minus signal would be coupled to the switch instead of the program audio. The program or IFB signal or a signal similar to the

program or IFB which is fed back to the talent will be referred to herein as the feedback signal. The feedback signal is that signal from which the talent signal is removed to provide the mix minus signal, and may or may not have the director's voice or other nonprogram signals mixed in.

The IFB signal shown in **Figure 1** is simply the program audio (containing the talent's delayed voice) with the director's voice instructions switched in at the director's discretion. This IFB is then transmitted back to the talent's headset 9 via IFB transmitter 6 and IFB receiver 18. In this fashion the talent can both receive instructions from the director, and listen to the program audio to receive appropriate time cues and possibly to carry on conversations with another talent. It might be noted that in some instances, even the IFB link is not available and the talent must operate solely by receiving the program broadcast from 17.

OBJECTS OF THE INVENTION

The invention described herein provides for a system of removing a first known signal from a second signal to provide a third signal.

A further object of the invention is to provide an improved IFB type system in which objectionable delayed audio is reduced or eliminated in the program audio feedback to the talent.

Another object of the invention is to provide an IFB like system in which a compensating delay is adjusted in order to provide a properly timed cancellation signal.

Yet another object of the invention is to provide an IFB

like system in which a cancellation signal is adjusted in magnitude in order to provide a desired amount of cancellation.

Still another object of the invention is to provide a comparison of talent and program signal or mix minus signal in order to determine an amount of delay to be applied to a cancellation signal in an IFB like system.

Yet still another object of the invention is to provide a comparison of talent and program signal or mix minus signal in order to determine an amount of gain to be applied to the talent signal to generate a cancellation signal in an IFB like system.

A yet further object of the invention is to provide an inspection of a mix minus signal in order to control the gain to be applied to the talent signal thereby providing a cancellation signal in an IFB type system.

A still further object of the invention is to provide a comparison of a cancellation signal with at least one of a talent and program signals in order to determine an amount of gain to be applied to the talent signal to provide a cancellation signal in an IFB type system.

A yet still further object of the invention is to provide the above objects in electronic systems other than IFB types for example where signals other than voice are used or in other than television or radio applications.

Other objects and features of the invention will be apparent to one of ordinary skill in the art from the teachings herein.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a drawing describing the prior art in which the invention finds use.

Figure 2 is a drawing of a first embodiment of the invention.

Figure 3 is a drawing of a second embodiment of the invention.

Figure 4 is a drawing of the preferred embodiment of the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The description of the preferred embodiment of the invention and prior art is given by way of example of television and radio production. The terms which are used in the disclosure and claims are those normally used in the industry however they are intended to carry broader than normal meaning, such that they cover any applicable utilization of the invention. These terms include, but are not limited to: feedback signal, which is intended to be the program like or IFB like signal which is fed back to the talent; talent, which is intended to refer to the source of any electronic signal which is to mixed with other electronic signals into a feedback electronic signal; talent signal, which is intended to refer to any electronic signal which is to mixed with other electronic signals into a program electronic signal and if not the same the feedback signal; program or program signal, which is intended to refer to a mixture of electronic signals including the talent signal which is recorded or broadcast; mix minus or

mix minus signal, the approximation of the program signal without the talent signal; cancellation signal, a signal (in delayed or undelayed form) which may be combined with the program signal to provide the mix minus signal.

The present invention may be utilized to create a mix minus program audio by inverting and delaying the talent's audio to create a cancellation signal which is combined with the program audio thus canceling out the talent's audit to create the mix minus audio.

The invention provides a mix minus signal from a program signal and a talent signal, the invention including a cancellation signal circuit responsive to the talent signal to delay, gain adjust (including phase adjust) the talent signal in variable delay and gain adjust circuits to provide a cancellation signal. The amount of delay and gain may be set by an operator, but is preferred to be responsive to the mix minus signal or said program signal to provide a cancellation signal. When responsive to the mix minus signal, the circuit is preferred to automatically operate to minimize the talent signal component of the mix minus signal. When responsive to the program signal, the circuit is preferred to automatically operate to determine the talent signal component of the program signal and adjust the cancellation signal to match in amplitude and delay, with opposite polarity to provide cancellation.

The invention may be responsive to both program and mix minus signals, for example to determine delay in response to one and amplitude in response to the other. It is also preferred that the unmixed talent signal be utilized in determining the delay

and amplitude of the cancellation signal, since it defines the portion of the program signal which is to be removed. The use of this talent signal in these determinations is not always necessary however, as will be understood from the teachings herein.

A combining circuit combines the program signal and the cancellation signal to provide the mix minus signal. If the delay and gain are responsive to the program signal, the amount of delay and gain necessary to match the talent signal content of the program signal is computed and the delay and gain set accordingly. If the delay and gain are responsive to the mix minus signal, the amount of residual talent signal content of the program signal is computed and the necessary change in delay and/or gain made accordingly. In either case, the gain of the gain stage may be positive or negative in order to provide cancellation. It is of course possible to make the delay stage responsive to one of the program signal or mix minus signal, and the gain stage responsive to the other.

It is preferred to utilize the talent signal along with one of the program signal or mix minus signal in order to simplify the determination of the amounts of delay and gain needed. It will be recognized however that the determination may be made solely by inspection of the mix minus signal, Or if the character of the program signal permits (for example if it only contains talent signal during certain intervals) that adjustment of gain and delay may be made solely in response to inspection of the mix minus or program signal. This is possible because optimum cancellation of the talent signal from the program signal leaves a minimum energy mix minus signal. Anything less than optimum

cancellation leaves either some cancellation signal (over cancellation) or talent signal (under cancellation). Either condition may be detected and appropriate adjustment of gain and delay made. If the program signal is known to contain only talent signal for certain intervals, the level and delay of the talent signal therein may be computed by inspection of only the program signal, and the amount of necessary delay and gain determined therefrom.

While it is normal that the distances involved in IFB systems are in the order of miles, it will be appreciated that the invention finds use without respect to the distance involved, and thus the distance may just as well be feet, especially in situations where delay is of significant size. In particular, the invention finds usefulness in overcoming problems with delays, which delays are sometimes, but not always, a consequence of the distance involved.

There are many applications where significant audio delays are involved without any significant distances, and the invention will find use in these applications as well. As an example of a use for the particular invention, a mix minus signal can be generated from the program signal by removing the talent's voice, thus eliminating the need for a separate mix minus mixer and transmission.

One application where delays, but not distance, are a problem is in virtual studios. In these studios the talent is televised in front of a chroma key blue screen, with a background electronically inserted behind the talent. A simple version of this system is used to insert weather maps behind weather fore-

casters. In more complex systems, the insertion of the background is made to track camera movement by use of substantial amounts of motion detection algorithms and other digital signal processing (DSP) operating on the video signal from the camera(s) which are televising the talent. The DSP processing of the video signal creates a substantial video delay, which with today's technology is in the order of 10 frames of video or 1/3 second. In order to keep the talent's speech in sync with his visual motion, a compensating audio delay is introduced into the talent's microphone audio. The talent's delayed audio is then used in an IFB system, causing the problems which are the subject of the present invention.

Again referring to **Figure 1**, in the remote location, the talent wears a headset 9 or other suitable means for conveying messages, preferably audio in nature, back to the talent. In some instances, part of the feedback is via tone or vibration, for example such as with common pagers. The feedback allows the talent to listen to (or respond to) the various audio program material which originates at the originating station, as well as hearing his own voice if program audio is utilized instead of mix minus program. For example, such audio material may include a local station announcer 1 which may introduce or carry on a conversation with the remote location talent and tape recorded material 2 such as commercials. The program material is mixed in a mix board 4, passed through a delay 5 which may be almost negligible or may be of significant length, and passed through an IFB (feedback) transmitter 6 and receiver 18, or via other suitable means back to the ENG (Electronic News Gathering) truck 11.

The ENG truck receives the transmitted audio signal from 6 with receiver 18 and couples it to the announcer's headset 9 so that the announcer may carry on a conversation with the local announcer 1 or may hear when the station is in a commercial break and playing back a commercial 2. Frequently the return path from 6 to 18 also incorporates some delay which is also problematic.

It will be seen in **Figure 1** that the audio program material from 4 via 5 is also sent to the program transmitter 17, recorder and/or other use, most of which result in viewing by the public. In such systems there are instances when the director needs to speak to the talent without interrupting the feed to 17. In the system shown, it is possible for the director 7 to break into the audio signal which is being sent back to the talent over link 6-18, via switch 8 in order to give the talent instructions which are unheard by the public audience. This "interruption" of the audio being fed back to the talent is the source of the name of this prior art system "Interrupted Feed Back" or IFB.

It will be appreciated that it is also possible for the talent to listen directly to the publicly transmitted program from 17, eliminating the separate switch 8 and transmitter 6. In such case the ENG truck 11 would simply house a receiver 18 tuned to allow the transmitted signal from 17 to be coupled into the talent's headset 9. The invention disclosed herein will be useful for these and any other manner of feedback to the announcer, and coupling of the microphone 10 into the station, the inventive features being useful for any such system or situation.

A problem with these prior art systems originates in the delays of the various audio signals which are received from and

fed back to the talent, and in particular the delays in his own voice as it passes from microphone 10 via ENG truck 11, microwave or satellite link transmitter 19 and receiver 3 mix board 4, delay 5, switch 8, transmitter 6 (or transmitter 17), receiver 18 in ENG truck 11 and headset 9 back to the announcer. In fact, any time the talent's voice is fed back (and possibly delayed) to the talent there is a problem, no matter what the mechanism or system. It is very disconcerting for the talent to hear himself talking at a significant loudness, and especially disconcerting to hear himself talking delayed, at any appreciable loudness. It is extremely difficult for a talent to perform effectively with this disconcerting situation present.

The present invention reduces or cures the above problems, and provides a mechanism for automatically compensating for delays and other variations in such systems. A feature of the invention described allows for adjusting the level of compensation according to the talent's preferences. A further feature of the invention allows for adjusting the level of compensation according to the amount of delay and/or the talent's preferences.

Figure 2 shows a first embodiment of the invention in which the sound from the talent's microphone 10 is delayed in a delay 12. Delay 12 is selected such that it matches, preferably closely, the delay which the talent's audio experiences in the loop to the station and back via the ENG truck to the headset 9. The gain or attenuation of the delayed audio is adjusted by a variable gain stage 14 such that when it is subtracted from the feedback audio from receiver 18 in a combiner 13 it reduces or cancels the delayed talent audio in the corrected audio which is coupled from

13 to the headphones 9.

It is preferred that variable delay 12 be continuously variable, that is that its delay may be changed without loss of any of the signal which is being delayed. In addition, it is preferred that the delay encompass pitch correction circuitry in order that the pitch of the signal being delayed remains constant as the delay is changing. It will be recognized that if the pitch is allowed to change during delay changes that no cancellation of the signal will take place in 13. For example if the delay is passing a 1000 Hz tone, and by the delay change the tone is changed to 1005 Hz, no cancellation of the 1000 Hz tone component in the feedback signal from 18 will be possible for the duration of the delay change. In addition, if the delay change is not continuous, the lost portions of signal in the delay will prevent cancellation of those portions in the feedback signal. Clearly, when the feedback signal's delay is constantly changing, the requirement for constant change of delay 12 would cause cancellation failure during that constant change. A suitable variable delay with pitch shifting is described in copending U.S. Patent Application serial no. 08/322,069 filed October 12, 1994.

In some instances the talent wishes to have full cancellation and in other instances the talent wishes to have only partial cancellation, depending on individual preferences. In order to accommodate the use of the system with different talents, an adjustment control 16 is provided to allow the amount of gain of 14, and hence the amount of cancellation of the talent's sound in the corrected feedback signal which is coupled from 13 to 9.

While the delay 12 is preferred to exactly match the delay

which the talent's audio experiences in the loop to the station and back to the ENG truck, it will be recognized that any delay amount, up to double what is the actual amount, will provide some cancellation. The delay may thus be fixed at the expected delay and will be useful without adjustment. If the delay is double the actual delay or more, then the cancellation attempt will create an echo effect, which may be desirable to some particular talent, but is generally considered by the inventor to be unsuitable. It should be remembered however that the invention is intended for the convenience of the talent and if he wants a particular delay value or cancellation setting 16 it should be utilized.

The delay 12 of **Figure 2** is preferred to be adjustable by the talent or other operator. Adjustment may simply be made by setting the gain of 14 to some value which is expected to be about 90% of that necessary for proper cancellation, and experimentally increasing and decreasing the delay length to find maximum cancellation. This procedure may be easily accomplished with an audio delay of the type which has one or two controls which simply cause increase or decrease of the delay. Such a delay is the AD2100 available from Pixel Instruments Corp. of Los Gatos, CA. 95030. After the delay is set, variable gain 14 is then adjusted for the proper level of cancellation desired by the talent. It should be noted that gain circuit 14 may incorporate phase adjustment as well in order to couple the proper phase of the canceling signal into 13. Such phase adjustment, and the need therefore, will be well understood from the teachings herein, and the practitioner of ordinary skill in the art will be capable of providing such operation from these teachings.

In some instances the delays and/or gains necessary to achieve high levels of cancellation are variable, sometimes constantly. In these instances it is preferred to inspect either the IFB (or program) audio from 18, or the mix minus audio from 13 with the adjustment circuit 16, thus allowing adjustment of the delay 12 and/or gain 14 automatically in response to the signal(s). The inventive concepts of performing automatic adjustment will be described in more detail with respect to the preferred embodiment of **Figure 3**.

Figure 3 shows the preferred embodiment of the invention in which the adjustment of the variable delay 12 and/or variable gain 14 are made automatically or semi automatically to facilitate setup at a particular location and tracking as the delay which the talent's audio experiences in the loop to the station and back to the ENG truck changes. The latter is of particular significance in situations where the audio is fed back to the station via satellite.

While it is generally assumed that geosynchronous satellites are stationary, such is actually not the case. Geosynchronous satellites generally wander about the heavens in a figure 8 pattern, and sometimes wander away from their appointed positions requiring correction with small onboard rocket motors. Such wanderings constantly change the path length to and from the satellite, and the changing path length causes the delay to change.

Additionally, especially in television stations, a video signal is transmitted back from the ENG truck to the station. At

the station, the video signal is delayed by one or more variable delays including video frame synchronizers. This video delay requires the use of a compensating audio delay to keep the audio and video synchronized. Such a compensating audio delay is taught in U.S. Patent 4,313,135 which is incorporated herein by reference with respect to its prior art teachings.

The compensating audio delay may be thought of as being included in delay 5, as may any other delay which occurs in the system.

The circuit of **Figure 3** shows inspection, for this example by correlation, and adjustment circuit 15a which operates to correlate the talent's microphone audio from 10 with the feedback audio (IFB or program) from 18 to determine the amount of delay of the talent audio contained in the signal at 18 and the necessary gain correction to provide the proper level of cancellation signal for the desired cancellation as established by 16. Alternatively the adjustment of 12 and/or 14 may be performed in response to the inspection of the mix minus signal from 13 as is performed by 15b. Inspection circuits such as for example correlation circuits suitable for such use are known to those of ordinary skill in the art, for example as disclosed in U.S. Patent Re. 33,535 (4,703,355). The circuit of Figure 11 of this patent is of particular interest.

Correlate and adjustment circuit 15a provides inspection of the program signal from 18 or alternatively of the mix minus signal from 13 to provide proper control signals coupled to variable delay 12 and variable gain (and/or attenuation) circuit 14 in order to establish the proper delayed and amplitude correc-

tion signal to be coupled to 13. It is noted that such inspection is preferred to be facilitated by also inspecting the talent signal from 10 in either delayed or undelayed form, and gain adjusted or unadjusted form as shown by the dashed connections. For example, correlation of the program signal from 18 and undelayed talent signal from 10 may be utilized to determine the proper delay, and inspection of the mix minus signal in response to the delayed talent from 14 used to determine the proper gain setting of 14.

Suitable variable audio delays are described in U.S. patents 4,313,135 and U.S. Patent Re. 33,535. The circuit of Figure 12 of the '535 patent is a particularly suitable variable audio delay which may be utilized. In addition, the aforementioned Pixel Instruments AD 2100 is capable of variable delay under control of 15. It is preferred that 15 operate continuously and automatically in order that changing delays and amplitudes in the loop back to the talent will be automatically compensated thus maintaining a consistent level of cancellation in the IFB audio signal which is fed back to the talent from 13.

Figure 4 shows the preferred embodiment of the invention as used with radio and television program production. The feedback audio signal, which for example may be the program audio signal which is received off the air, is input at 20. The talent audio signal from the talent is input at 21. Both signals are preferred to be low pass filtered to the same bandwidth of 3.5 KHz by 21 a and b to remove noise and to reduce sampling requirements for the variable delay 12, however this is optional. The LPF filtered feedback and LPF filtered talent signals are coupled to a delay

detector 23, for example such as is described in the aforementioned U.S. Patent Re. 33,535 which delay detector measures the delay of the talent signal component of the LPF feedback signal with respect to the LPF talent signal.

The delay measure is coupled to variable delay 12 to delay the LPF talent signal by an amount which matches the delay of the talent signal component of the LPF feedback signal. The delayed LPF talent signal from 12 is coupled to a zero crossing comparator 24 and a variable gain circuit 14. The zero crossing comparator outputs a logic high signal when the delayed LPF talent signal is positive. This logic signal is coupled to switch 25 which operates as a sampling circuit to pass the mix minus signal from 13 to an error integrator 25. Since the program portion of the LPF feedback signal is random with respect to the closing of 25, it will integrate to zero in 24. The talent signal component of the LPF feedback signal will be the same polarity, positive or negative whenever the switch is closed. Assuming that the variable gain is insufficient to achieve proper cancellation of the talent signal component in 13, the positive residual component will charge the integrator 26 more positive thus increasing the gain. The charging will continue until a zero residual component is reached, at which time the integrator will no longer be charged and will hold that value which is necessary for cancellation. Any change in the amplitude of the talent signal component of the LPF feedback signal will thus be automatically compensated.

If the phase of the talent signal component of the LPF feedback signal should change, or initially be negative, the

integrator 26 will charge negative until a negative output is achieved. At that time the variable gain will change from positive to inverting, thus providing the proper phase cancellation signal. As above, the integrator will continue to charge until a proper cancellation is achieved resulting in no residual error. While the above described methods of adjusting delay in 12 and gain in 14 is preferred, one of ordinary skill in the art will be able to adapt other circuits and techniques for the same purpose, but tailored to different applications and levels of performance from the teachings herein. For example, the gain setting circuit may include a synchronous detector, multiplier or mixer along with appropriate filtering of the output for coupling to the gain circuit 14.

While elements 12-16 are shown in their preferred location in the ENG truck 11, one of ordinary skill in the art will recognize from the teachings herein that they may be physically and electrically located separately or together anywhere in the system as long as they perform the function of providing suitable cancellation of an unwanted talent audio signal. In addition, it will also be recognized from the teachings herein that the connection of these various elements may be interchanged as desired to optimize the system for lower cost or higher performance or both. In particular the locations of the variable delay 12 and variable gain 14 may be interchanged.

The correlation 15a may operate with the feedback audio from 18 in either regular form from 18 or in mix minus form from 13. Comparison by 15 may also operate with the talent's audio directly from microphone 10 or after that audio has been delayed by 12

or after both delay and gain adjustment by 12 and 14, or after gain adjustment 14 only if 12 and 14 are swapped. It is also possible that the comparison may operate only with the mix minus audio from 13 receiving the talent audio and feedback audio after correction, without any direct connection to 10 (or 12 or 14) or the signal from 6, as is shown by 15b. Combinations of these various connections may be utilized as well in order to tailor the operation of the invention to particular system needs.

Manual cancellation adjustment 16 is preferred to be operated by the talent or other operator, and may also be responsive to the delay from 15a (or 15b). It will be noted that while some talents like a small amount of feedback of their own voice if the delay is small, most prefer total cancellation of their own voice if the delay increases. By coupling 16 to the delay control from 15, it is possible to provide this feature.

The invention described herein by way of explanation of the preferred embodiment may be practiced with numerous changes in the arrangement, structure and combination of the individual elements, as well as with substitution of equivalent functions and circuits for the elements in order to optimize the invention for a particular application, all without departing from the scope and spirit of the invention as described herein.

WHAT IS CLAIMED IS:

Claim 1 A system for providing a mix minus signal from a feedback signal and a talent signal including in combination:

a cancellation circuit responsive to said talent signal to delay said talent signal in a variable delay and to gain adjust said talent signal in delayed or undelayed form in a variable gain circuit thereby providing a cancellation signal, with the amount of said delay or gain responsive to operator adjustment;

a combining circuit responsive to said feedback signal and said cancellation signal to provide said mix minus signal.

Claim 2 A system for providing a mix minus signal from a feedback signal and a talent signal including in combination:

a cancellation circuit responsive to said talent signal to delay said talent signal in a variable delay and to gain adjust said talent signal in delayed or undelayed form in a variable gain circuit thereby providing a cancellation signal, with the amount of at least one of said delay or gain responsive to said mix minus signal or said feedback signal or both;

a combining circuit responsive to said feedback signal and said cancellation signal to provide said mix minus signal.

Claim 3 A system for providing a mix minus signal from a feedback signal and a talent signal including in combination:

a cancellation circuit responsive to said talent signal to delay said talent signal in a variable delay and to gain adjust

said talent signal in delayed or undelayed form in a variable gain circuit thereby providing a cancellation signal, with the amount of said delay and gain automatically responsive to at least one of said mix minus signal and said feedback signal and; a combining circuit responsive to said feedback signal and said cancellation signal to provide said mix minus signal.

Claim 4 A system as claimed in claim 1, 2 or 3 wherein said amount of said delay is responsive to said feedback signal and the amount of said gain is responsive to said mix minus signal.

Claim 5 A system as claimed in claim 1, 2 or 3 wherein said amount of said delay is responsive to said mix minus signal and the amount of said gain is responsive to said feedback signal.

Claim 6 A system as claimed in claim 1, 2 or 3 wherein said amount of said delay and said amount of said gain is responsive to said feedback signal.

Claim 7 A system as claimed in claim 1, 2 or 3 wherein said amount of said delay and said amount of said gain is responsive to said mix minus signal.

Claim 8 A system as claimed in claim 1, 2 or 3 wherein at least one of said amount of said delay and said amount of said gain is responsive to a correlation of said mix minus signal and said talent signal wherein said talent signal is in delayed form.

Claim 9 A system as claimed in claim 1, 2 or 3 wherein at least one of said amount of said delay and said amount of said gain is responsive to a correlation of said feedback signal and said talent signal wherein said talent signal is in delayed form.

Claim 10 A system as claimed in claim 1, 2 or 3 wherein at least one of said amount of said delay and said amount of said gain is responsive to a correlation of said mix minus signal and said talent signal wherein said talent signal is in undelayed form.

Claim 11 A system as claimed in claim 1, 2 or 3 wherein at least one of said amount of said delay and said amount of said gain is responsive to a correlation of said feedback signal and said talent signal wherein said talent signal is in undelayed form.

Claim 12 A system as claimed in claim 1, 2 or 3 wherein at least one of said amount of said delay and said amount of said gain is responsive to a correlation of said mix minus signal and said talent signal wherein said talent signal has been gain adjusted in said gain adjust circuit.

Claim 13 A system as claimed in claim 1, 2 or 3 wherein at least one of said amount of said delay and said amount of said gain is responsive to a correlation of said feedback signal and said talent signal wherein said talent signal has been gain

adjusted in said gain adjust circuit.

Claim 14 A system as claimed in claim 1, 2 or 3 wherein at least one of said amount of said delay and said amount of said gain is responsive to a correlation of said mix minus signal and said talent signal wherein said talent signal has been gain adjusted in said gain adjust circuit.

Claim 15 A system as claimed in claim 1, 2 or 3 wherein at least one of said amount of said delay and said amount of said gain is responsive to a correlation of said feedback signal and said talent signal wherein said talent signal has been gain adjusted in said gain adjust circuit.

Claim 16 A system as claimed in claim 1, 2 or 3 wherein at least one of said amount of said delay and said amount of said gain is responsive to a correlation of said feedback signal and said cancellation signal.

Claim 17 A system as claimed in claim 1, 2 or 3 wherein at least one of said amount of said delay and said amount of said gain is responsive to a correlation of said mix minus signal and said cancellation signal.

Claim 18 A system as claimed in claim 1, 2 or 3 wherein said delay is automatically adjustable in response to changes in relative delay of said talent signal and the talent signal component of said feedback signal.

Claim 19 A system as claimed in claim 1, 2 or 3 wherein said delay is automatically adjusted in response to comparison of said feedback signal and said talent signal in undelayed form, and said gain is automatically adjusted in response to said mix minus signal and said talent signal in delayed form.

[illegible]

ABSTRACT

The present invention provides a cancellation signal which may be combined with a radio or television program signal to provide a mix minus signal for use in IFB communication with the talent. A cancellation signal circuit is responsive to a talent signal to delay and gain adjust the talent signal to provide the cancellation signal. The amount of gain and delay necessary may be adjusted by an operator, or automatically determined or set in response to the program signal or the mix minus signal. Automatic operation is provided even in the presence of changing delay and amplitude of the program signal or the talent signal component thereof.

4-64760 " 35442880

08/824496

Approved for use through 07/31/96. OMB 0651-0031

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.101 & 1.27(b)) - INDEPENDENT INVENTOR

Docket Number (Optional)
 JCC396A

Applicant or Patentee: J. Carl Cooper

*>Application< or Patent No.: _____

Filed or Issued: Filed Herewith

Title: Improved IFB System Apparatus and Method

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees to the Patent and Trademark Office described in:

- ☒ the specification filed herewith with title as listed above.
☐ the application identified above.
☐ the patent identified above.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ No such person, concern, or organization exists.
☐ Each such person, concern or organization is listed below.

Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

J. Carl Cooper
 NAME OF INVENTOR
[Signature]
 Signature of inventor
3/14/97
 Date

 NAME OF INVENTOR

 Signature of inventor

 Date

 NAME OF INVENTOR


 Signature of inventor

 Date

08/824496

CERTIFICATE UNDER 37 CFR 1.8(a)

I hereby certify that this correspondence is being deposited
this day with the United States Postal Service postage prepaid
as Express mail, certificate no. EM 1122312870
in an envelope addressed to: Patent Application, Assistant
Commissioner of Patents, U.S. Patent Office, Washington, D.C.
20231.

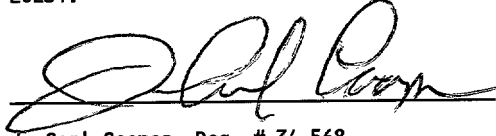
J. Carl Cooper, Reg. # 34,568

3/14/97
Date

4547E0" 36442880



08/824496

718 University Ave.
Suite 210
Los Gatos, CA. 95030
March 28, 1997

Box Patent Application
Assistant Commissioner for Patents
U.S. Patent Office
Washington, D.C. 20231

Via Express Mail # EM112231295US

Dear Sir:

On March 14, Applicant mailed the enclosed patent application to the Patent Office via Express Mail, certificate # EM112231287US. The package was received by the Post Office and Applicant was given a mailing receipt showing deposit with the Post Office at 2:33 PM on March 14, 1997.

Today, the Express Mail package was returned to Applicant, having been opened, with a letter reciting that postage was short due to an outdated reading on the meter postage. Applicant notes that the date on the meter postage is March 14, the same date which the Express Mail envelope was received by the Post Office.

Applicant is currently attempting to communicate with the Post Office to determine why the Express Mail envelope was returned, opened, to Applicant.

In that Applicant initially deposited the enclosed application with the U.S. Post Office with sufficient postage, and obtained a receipt for that deposit, Applicant respectfully requests that this application be given the filing date of March 14, 1997.

Copies of Applicant's initial receipt, the returned envelope and the letter accompanying the returned envelope are enclosed herewith.

Sincerely

J. Carl Cooper
Reg. 34,568


08/824496

08/8244 9A



CERTIFICATE UNDER 37 CFR 1.8(a)

I hereby certify that this correspondence is being deposited
this day with the United States Postal Service postage prepaid
as Express mail, certificate no. EM 112231 295US
in an envelope addressed to: Patent Application, Assistant
Commissioner for Patents, U.S. Patent Office, Washington, D.C.
20231.


J. Carl Cooper, Reg. # 34,568

3/28/97
Date

454747 96442880

The sender has requested notification upon delivery: immediately upon receipt, please telephone:

 () No

EXPRESS MAIL

UNITED STATES POSTAL SERVICE

TO ADDRESSEE

EXPRESS MAIL

UNITED STATES POSTAL SERVICE

EMT12231287US

For Pickup or Tracking Call 1-800-222-1811

* * U 2 8 2 1 3 2 T M E

OUTDATED

ORIGIN (POSTAL USE ONLY)

**INTERNATIONAL
SHIPMENTS ONLY**

Business Papers

Merchandising

Customers' forms and commercial invoices may be required.
See Pgs. 279 and
International Mail Manual.

No Delivery

Weekend

☐ Holiday

Clerk Initials

5

69

2

X	

1

100

A

10

10

1

FOR CUSTOMER USE ONLY

TO FILE A CLAIM FOR DAMAGE OR LOSS OF CONTENTS, YOU MUST PRESENT THE ARTICLE, CONTAINER AND PACKAGING.

☐ **WAIVER OF SIGNATURE** (Domestic agent) (If in the judgment of the dealer that the shipment was delivered and

☐ **NO DELIVERY**

☐ **WEEKEND** ☐ **HOLIDAY**

...the fact that the [redacted] is a [redacted] employee, the [redacted] understand that the [redacted]

Customer Signature _____



FRANK J. EASE PHILLIPS

1100

1. *What is the purpose of the study?*

L

PIXEL INSTRUMENTS CORP. 210
718 UNIVERSITY AVE STE
LOS GATOS CA 95030-3317

Box Patent Application
Assistant Commissioner for Patents
U.S. Patent Office
Washington, D.C. 20231

(IfB) sy
grams. The
communication de
B). In a commo
n of the tale
ich is mixed
the talent's
action will als
achings herel
vention



communicating
to and tele-

00324436 031437

POST OFFICE
TO ADDRESSEE

EXPRESS MAIL
UNITED STATES POSTAL SERVICE

EM112231287US



* E M J L 2 2 3 J 2 8 7 U S *

ORIGIN (POSTAL USE ONLY)

INTERNATIONAL SHIPMENTS ONLY		Date in Month <u>4</u> Day <u>14</u> Year <u>97</u>		Day of Delivery <input checked="" type="checkbox"/> First <input type="checkbox"/> Second		Postage <u>\$ 10.75</u>	
<input type="checkbox"/> Business Papers	<input type="checkbox"/> Merchandise	Time in AM <input type="checkbox"/> PM <input checked="" type="checkbox"/>		Military <input type="checkbox"/> 12 Noon <input checked="" type="checkbox"/> 3 PM		Return Receipt <input type="checkbox"/>	
Customs forms and commercial invoice may be required for items valued over \$500 and instructional mail material		Weight <u>2.33</u> lbs <input type="checkbox"/> oz <input checked="" type="checkbox"/>		Int'l Alpha Country Code		COD <input type="checkbox"/>	
No Delivery <input type="checkbox"/> Weekend <input type="checkbox"/> Holiday <input type="checkbox"/>		Acceptance Clerk Initials <u>W</u>		Total Postage & Fees \$			

CUSTOMER USE ONLY

METHOD OF PAYMENT Express Mail Corporate Act No Postal Service Act No		<input type="checkbox"/> WAIVER OF SIGNATURE (Domestic Only) I warrant delivery to be made without obtaining the signature of the addressee or the signature of the addressee's agent if in the judgment of the delivery employee, the article can be left in a secure location and I authorize the delivery employee to sign the signature of the addressee's agent if the signature was obtained and understand that the signature of the delivery employee will constitute valid proof of delivery.	
<input type="checkbox"/> NO DELIVERY		<input type="checkbox"/> WEEKEND <input type="checkbox"/> HOLIDAY	
FROM (PLEASE PRINT) PIXEL INSTRUMENTS CORP 718 UNIVERSITY AVE STE 210 LOS ANGELES CA 90030-3317		TO (PLEASE PRINT) Box Patent Application Assistant Commissioner for Patents U.S. Patent Office Washington, D.C. 20231	

SEE REVERSE SIDE FOR THE
SERVICE GUARANTEE AND LIMITS
ON THE INSURANCE COVERAGE

OFFICE 95101 STATION SMF DATE MAR 27 1991
FOUR 3 TIME FOUR
FIRM NAME Pixel Instruments Corp. 81824496
ADDRESS 718 University, Suite 210
CITY Los Angeles STATE CA ZIP CODE 95030-3317

AMOUNT SHOWN ON MAIL
CORRECT RATE
AMOUNT SHORTPAID

REVENUE PER PIECE
5.00 + 5.75 (OUT DATED 3/14/97)
10.75
10.75

ANY QUESTIONS CONCERNING THIS SHOULD BE DIRECTED TO REVENUE PROTECTION
PHONE 408-437-6603

ADDITION AMOUNT DUE POSTAL SERVICE

NOTE: PLEASE AFFIX ADDITIONAL POSTAGE TO EACH PIECE.

1 (NUMBER OF PIECES) X 10.75 (AMOUNT SHORTPAID) \$10.75

COMMENTS: Outdated meter postage tapes 3/14/97
Meter postage must be current, the
date of deposit. Express mail flat
returned for \$10.75 with correct
postage date, the date of deposit

CERTIFIED BY [Signature]

INCLUDES ALL ORIGINATING MAILING OF TEN OR MORE PIECES. AMOUNT OF
SHORTPAID POSTAGE MUST BE COLLECTED AND REFLECTED ON MAIL BEFORE
PROCESSING BY POSTAL SERVICE (REFERENCE DMM 146-1230)

461100 "96112880

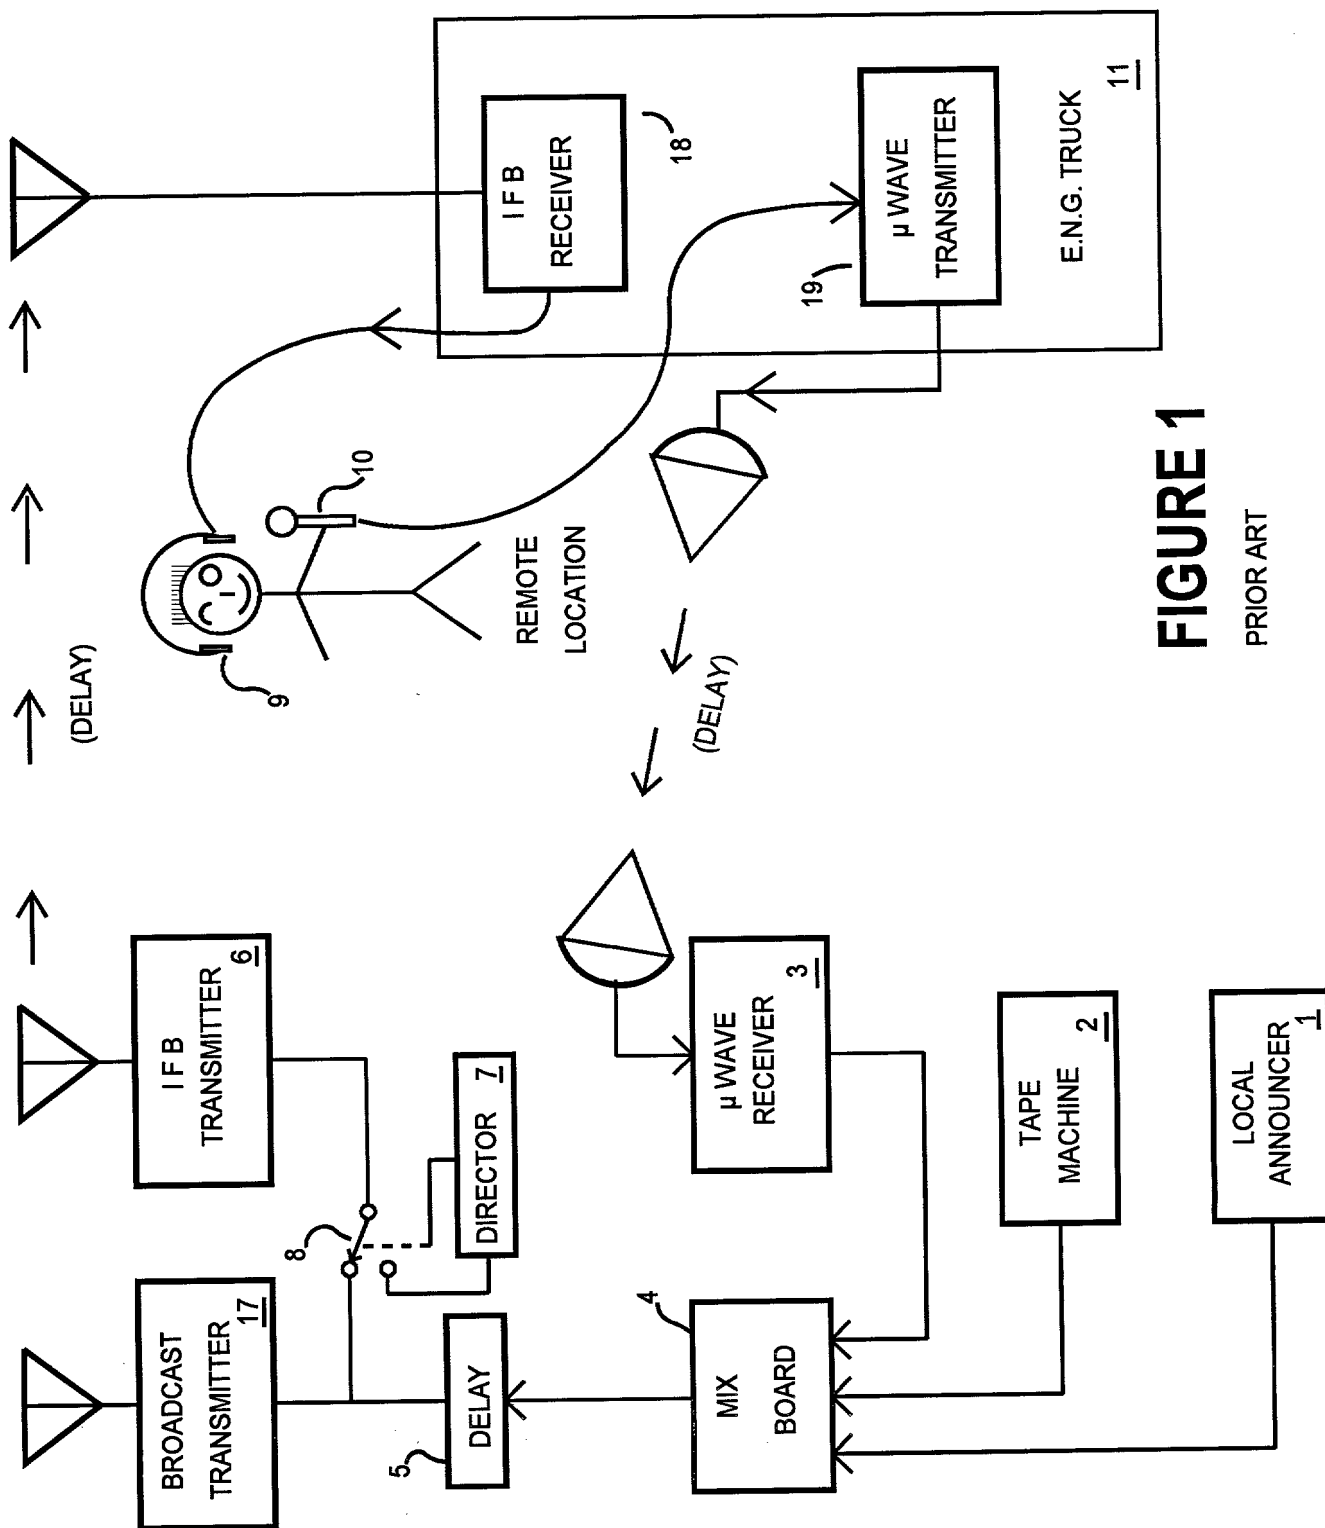
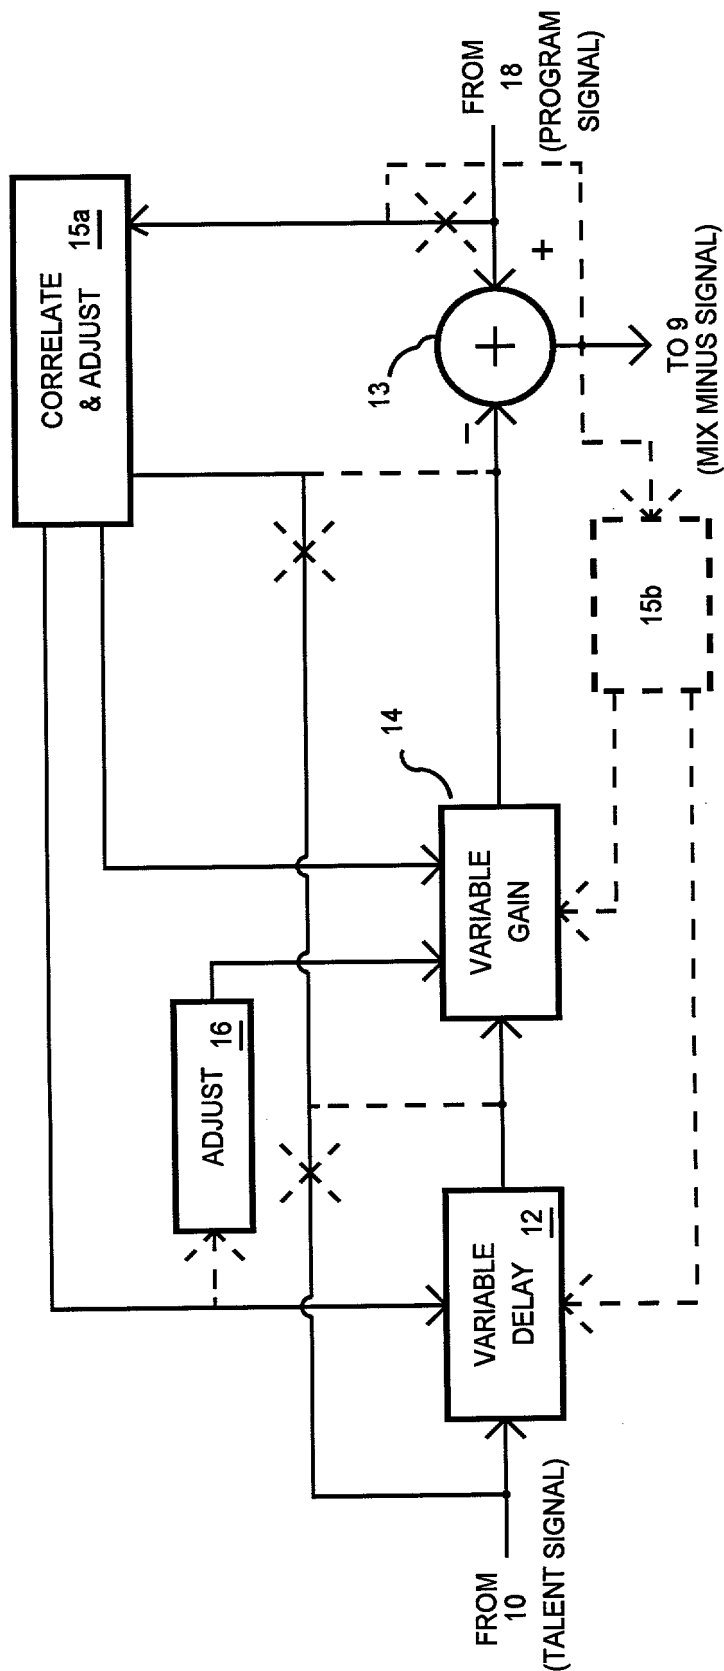
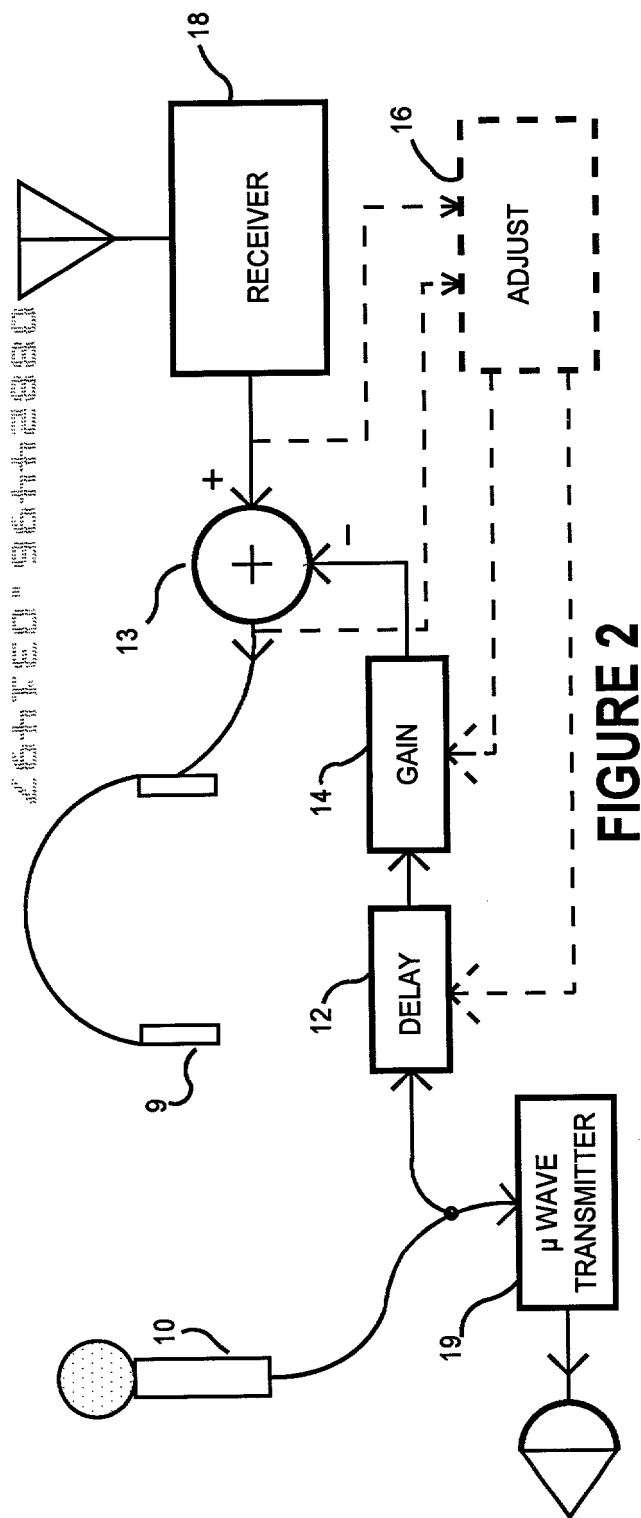


FIGURE 1

PRIOR ART



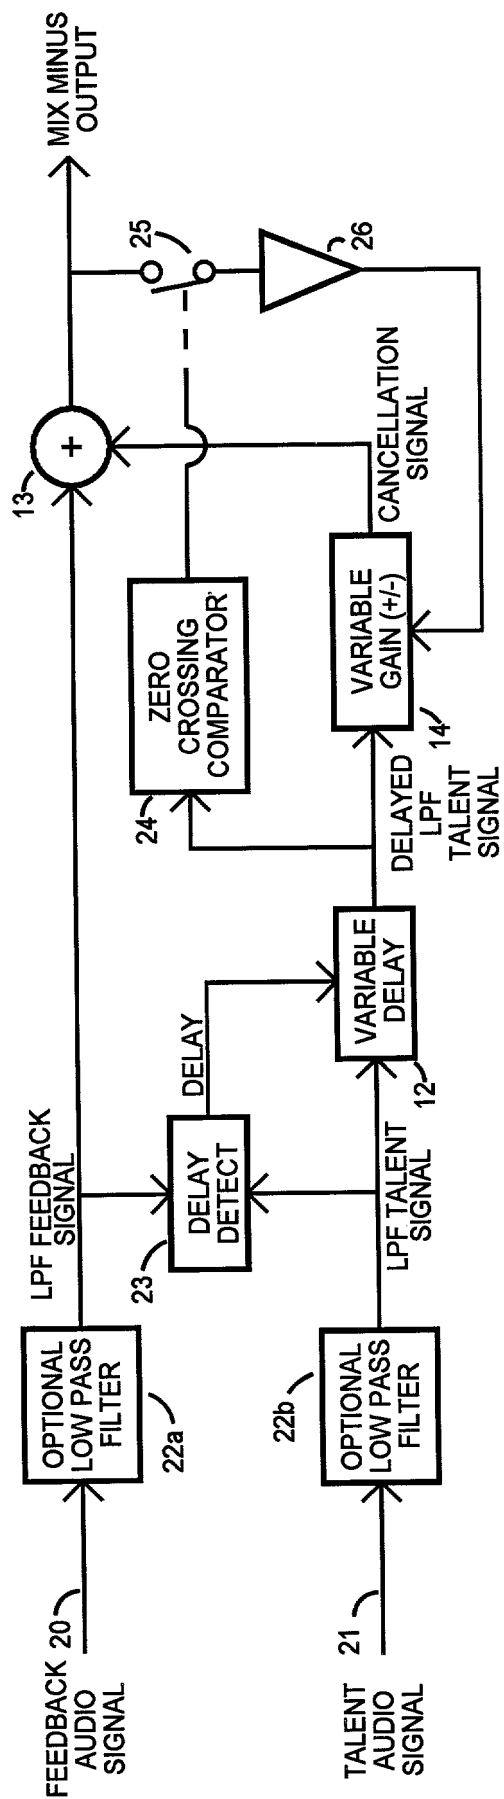


FIGURE 4

PATENT

Attorney's Docket No. JCC396A

COMBINED DECLARATION AND POWER OF ATTORNEY

(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL, DIVISIONAL,
CONTINUATION OR CIP APPLICATION)

As a below named inventor, I hereby declare that:

TYPE OF APPLICATION

This declaration is for the following type application:

(check one applicable item below)

☒ original☐ design

NOTE: If the declaration is for an International Application being filed as a divisional, continuation or continuation-in-part application do not check next item and check appropriate one of last three items.

☐ national stage of PCT☐ supplemental

NOTE: If one of the following 3 items apply then complete and attach ADDED PAGES FOR DIVISIONAL, CONTINUATION OR CIP.

☐ divisional☐ continuation☐ continuation-in-part (CIP)

INVENTORSHIP IDENTIFICATION

WARNING: If the inventors are each not the inventors of all the claims an explanation of the facts, including the ownership of all the claims at the time the last claimed invention was made, should be submitted.

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Improved IFB System Apparatus and Method

SPECIFICATION IDENTIFICATION

the specification of which: (complete (a), (b) or (c))

(a) ☒ is attached hereto.(b) ☐ was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable).

NOTE: Amendments filed after the original papers are deposited with the PTO which contain new matter are not accorded a filing date by being referred to in the declaration. Accordingly, the amendments involved are those filed with the application papers or, in the case of a supplemental declaration, are those amendments claiming matter not encompassed in the original statement of invention or claims. See 37 CFR 1.67.

(Declaration and Power of Attorney [1-1]—page 1 of 4)

(c) ☐ was described and claimed in PTC International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____ (if any).

ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

☐ In compliance with this duty there is attached an information disclosure statement. 37 CFR 1.97.

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

(complete (d) or (e))

(d) ☒ no such applications have been filed.

(e) ☐ such applications have been filed as follows

EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

COUNTRY	APPLICATION NUMBER	DATE OF FILING (month, day, year)	PRIORITY CLAIMED UNDER 37 USC 119
			<input type="checkbox"/> YES NO <input type="checkbox"/>
			<input type="checkbox"/> YES NO <input type="checkbox"/>
			<input type="checkbox"/> YES NO <input type="checkbox"/>
			<input type="checkbox"/> YES NO <input type="checkbox"/>
			<input type="checkbox"/> YES NO <input type="checkbox"/>

ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

POWER OF ATTORNEY

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

J. Carl Cooper, Reg. 34,568

SEND CORRESPONDENCE TO

J. Carl Cooper
% Pixel Instruments
718 University Ave.
Suite 210
Los Gatos, CA. 95030

DIRECT TELEPHONE CALLS TO:

(Name and telephone number)

(408) 354-9122

DECLARATION


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SIGNATURES

Full name of sole or first inventor

J. Carl Cooper

Inventor's signature



Date 3/14/97

Country of Citizenship USA

Residence Monte Sereno, CA

Post Office Address: 15288 Via Pinto.

Monte Sereno, CA 95030

Full name of second joint inventor, if any

Inventor's signature

Date

Country of Citizenship

Residence

Post Office Address

CHECK PROPER BOX(ES) IF ANY OF THE FOLLOWING ADDED PAGE(S) FORM A PART OF
THIS DECLARATION

- ☐ Signature for third and subsequent joint inventors. Number of pages added _____
- ☐ Signature by administrator(trix), executor(trix) or legal representative for deceased or incapacitated inventor. Number of pages added _____
- ☐ Signature for inventor who refuses to sign or cannot be reached by person authorized under 37 CFR 1.47. Number of pages added _____

- ☒ Added pages to combined declaration and power of attorney for divisional, continuation, or continuation-in-part (CIP) application.

☐ Total pages added to this Declaration

If no further pages form a part of this Declaration check the following item

- ☒ This declaration ends with this page